

# Specification

## M Series



- ☑ Model M0.7, M1, M1.2, M1.5, M1.7, M2, M2.2, M2.5, M2.8, M3, M3.5, M4, M4.8, M6, M6.8, M8, M10, M12, M16
- ☑ LED type SMD 3 in 1
- ☑ LED cabinet size (WxH) (mm) 480mmx480mm
- ☑ Brightness (calibrated) Indoor: 1,200-2,000 nits / Outdoor: 6,000 nits
- ☑ Weight 7-10 kgs
- ☑ IP rating Indoor: IP30 / Outdoor: IP66
- ☑ Processing depth 24 bit
- ☑ Lifespan 100,000 hours
- ☑ Operating environment Temperature: indoor: -30°C - 40°C / outdoor: -30°C - 50°C; Humidity: 10% - 90% RH

## B Series



- ☑ Model B25, B50, B80, B100
- ☑ LED type LED lamp
- ☑ Brightness 6,000 nits
- ☑ IP rating IP65
- ☑ Processing depth 16 bit
- ☑ Lifespan 100,000 hours
- ☑ Operating environment Temperature: -30°C—50°C ; Humidity: 10%—90%RH


## FS Series



- ☑ Model FS04, FS06, FS08, FS10, FS12, FS16, FS20
- ☑ LED type SMD 3 in 1
- ☑ Brightness (calibrated) Indoor: 2,000 nits / Outdoor: 6,000 nits
- ☑ IP rating Indoor: IP30 / Outdoor: Front: IP65, Rear: IP54
- ☑ Processing depth 20 bit
- ☑ Lifespan 100,000 hours
- ☑ Operating environment Temperature: indoor: -30°C—40°C / outdoor: -30°C—50°C ; Humidity: 10%—90%RH




## F4 Series

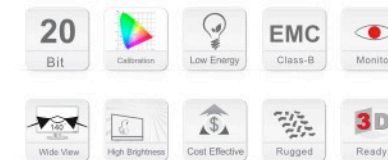

- ☑ Model F4P16, F4P20, F4P25, F4P32, F4V8, F4V10, F4V12, F4V16, 1R1G1B / 2R1G1B
- ☑ LED type 1R1G1B / 2R1G1B
- ☑ Brightness (calibrated) 6,500 nits
- ☑ IP rating Front: IP65, Rear: IP54
- ☑ Processing depth 20 bit
- ☑ Lifespan 100,000 hours
- ☑ Operating environment Temperature: -30°C—50°C; Humidity: 10%—90%RH



## LF Series

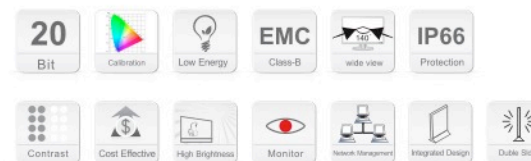

- ☑ Model LF1.2, LF1.7, LF2, LF2.2, LF3.5, LF4.8, LF6
- ☑ LED type SMD 3 in 1
- ☑ Display area (mm) Indoor: 1,200x2,400mm Outdoor: 1,152x1,728mm
- ☑ Furniture Unit Size (mm) 1,319mm x 2,519mm x 115mm
- ☑ Brightness (calibrated) Indoor: 1,500 nits Outdoor: 5,500 nits
- ☑ IP rating Indoor: IP30 Outdoor: IP55
- ☑ Processing depth 20 bit
- ☑ Lifespan 100,000 hours
- ☑ Operating environment Temperature: -30°C—45°C; Humidity: 10%—90%RH

